

METAGO

The Integrated LED Display Terminal

Your Trustworthy Display Solution Provider



The beauty of nature can be presented on
LianTronics displays, but it deserves to be
better presented in real life too.
Recycle and protect our home.



Official Website

LIANTRONICS CO., LTD.

HQ.Add: 16/F, Block B4, Building 9, Zone 2, Shenzhen Bay
Science and Technology Ecological Park, Nanshan District,
Shenzhen, China
Hotline: +86-755-23001729
Website: www.liantronics.com
E-mail: service@liantronics.com
Edition: April, 2025

METAGO Profile

Committed to improve customers’ experience and meeting efficiency, METAGO, an integrated LED display terminal developed by LianTronics, can help to achieve an ultimate business meeting comfort of “interaction by visualization, communication without restriction”. Associated with keywords of simplification, intelligence, stability and exquisiteness, it can create a more relaxing and pleasant business atmosphere for all attendees.

METAGO has integrated frequently-used meeting functions including wireless mirroring, video conferencing and interactive writing. Standing out with FHD giant screen, extraordinary display effect, extremely simplified operation, intelligent cluster management and more, METAGO can be widely used in different scenarios such as medium and large meeting rooms, conference halls, multi-functional halls, multimedia rooms, and lecture theatres to break through the space limitation and quickly gather various viewpoints from multiple terminals. All is designed to free your imagination during collaboration.

- 

FHD Display
- 

Huge Screen
- 

Quick Start
- 

Multi Touch
- 

Video Conference
- 

Wireless Mirroring
- 

Dual System
- 


Smart Control





Ultra-Slim Artwork, Multiple Size Options

- Ultra-thin screen with a sleek black body, perfect for any professional space.
- Available in 135" and 162" sizes, with a 16:9 aspect ratio and standard 2K resolution.

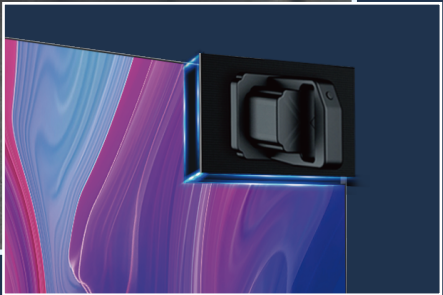

Front Maintenance of Modules

Modular Design, Quick Installation & Maintenance

- Wall-mounting or pedestal mounted with quick installation by 2 people within 2 hours.
- Front-access modular design for quick, on-site repairs with replaceable parts.



Ultra-Wide Viewing & Impressive HD Quality

- Cinematic display with intelligent brightness calibration for even, clear visuals.
- 170° Wide Viewing Angle: Perfect visibility from all angles without glare or color shift.



Energy
Efficient



High
Protection



Superior
Contrast



Advanced COB LED Panel (Optional)

- Full-flip-chip COB technology: Superior contrast and color accuracy for true-to-life and eye-friendly visuals.
- Energy efficient: Low power consumption with a common cathode design and efficient cooling.
- High protection: COB panel can be touched, wiped, and not afraid of bumps and impacts.

8-CORE
CPU

4GB+64GB
Ram & Rom

7680*4320@60FPS
Ultra-smooth playback

WI-FI 6
Dual-mode


METAGO



Voice
Assistant



Bluetooth
Remote Control

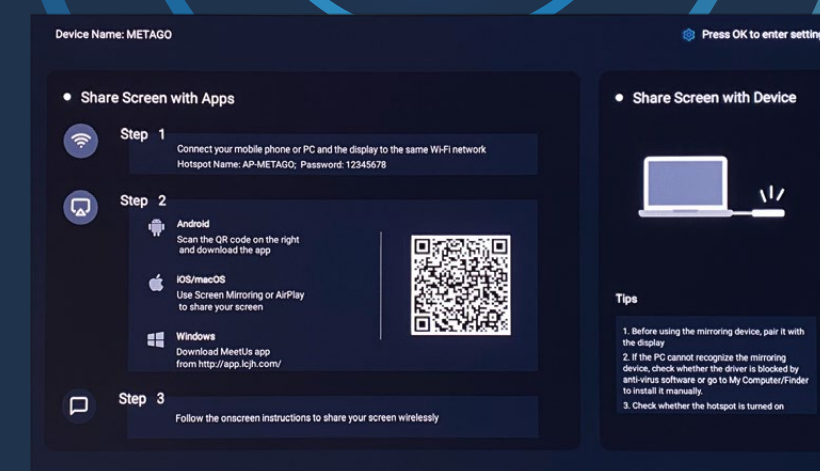


Powerful Performance, Smooth Operation

- Customized operating system: 8-core processor, 4GB RAM, 64GB storage for lag-free performance.
- Video decoding: Supports up to 7680*4320@60fps for ultra-smooth playback.
- Built-in Wi-Fi 6 network card: Dual-mode support for simultaneous screen casting and internet access.
- Optional OPS: Configurable Windows, Linux and more, seamless dual system operation.

Smart Remote & Voice Control

- Dual bluetooth/IR remote: Easy control with both Bluetooth and infrared options.
- Voice assistant: Use voice commands to control operations, in put text, search, or switch scenes.

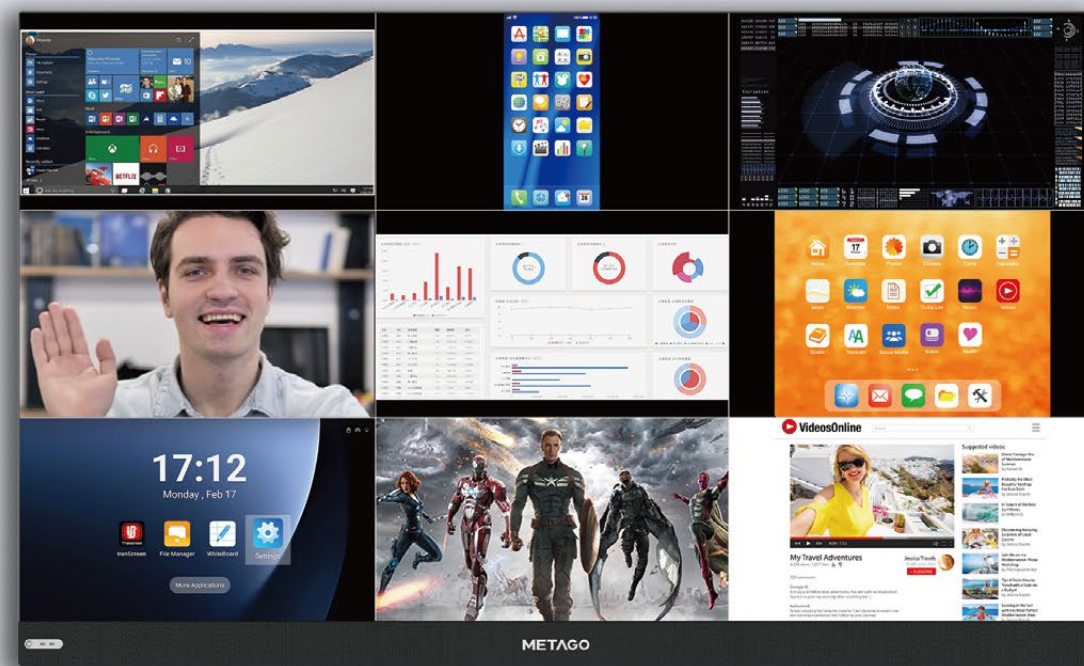

Windows/iOS/Andriod/Harmony OS

Easy Screen Sharing & Multi-Device Access Supported


- Multiple projection methods: HDMI2.0, wireless dongle, LAN, and cloud casting options.
- Share up to 9 screens simultaneously, supporting access of various devices and systems.



Four display modes



Quick control center



Touchscreen Support



Annotation & Whiteboard




File Transfer

Comprehensive Features for Smart Meetings

- Touchscreen support: Interact directly with the display for a more dynamic experience.
- External device support: Integrate cameras, microphones, and other peripherals.
- Quick control center: Access features like screenshots, recording, and camera settings.
- Annotation & Whiteboard & File transfer: Lock the content on screen and annotate directly with touch or mouse, with easily transfer files via QR code or IP.
- Four display modes: Customizable for documents, videos, meetings, and more.

Application

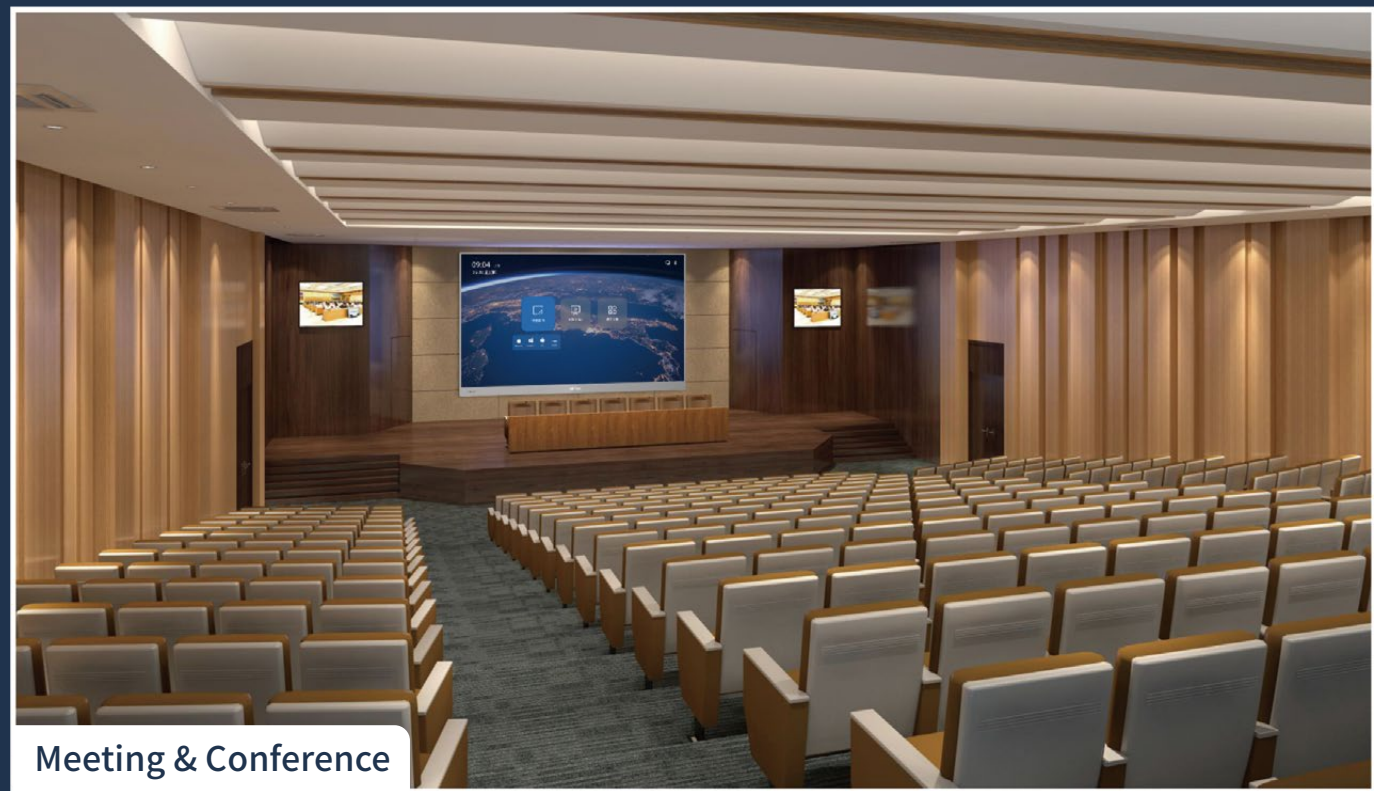

Meeting & Conference

Application




Exhibition & Display



Education & Training



Private Cinema

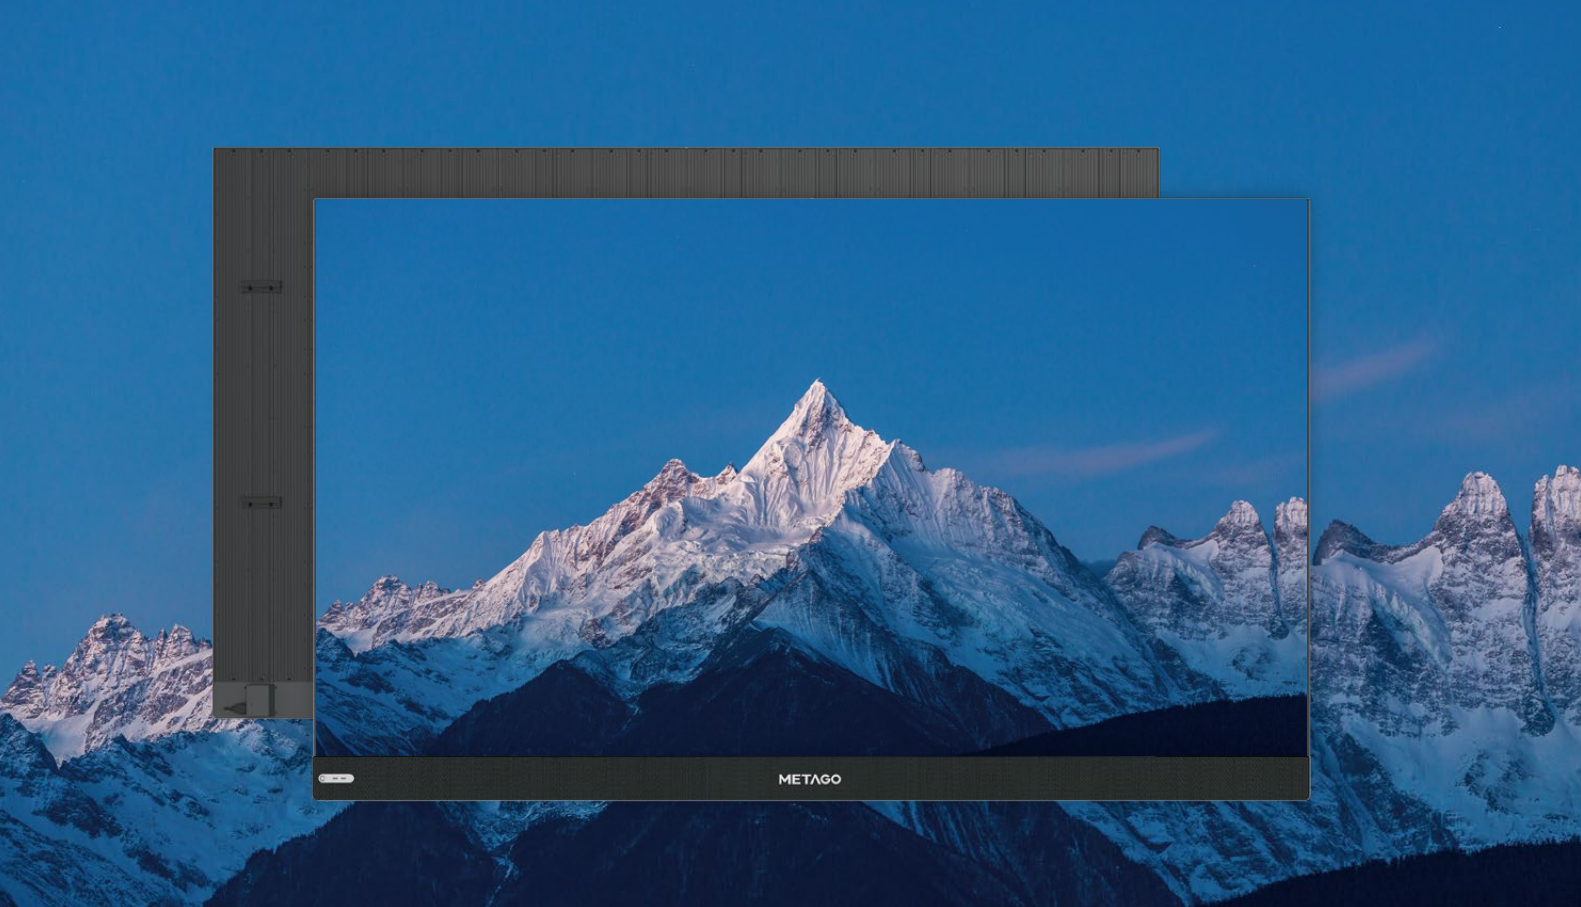


LT135/LT135 (COB)/LT162

METAGO

Install Magnetically & Rapidly, Present Sharply & Intelligently			
Model	LT135	LT135 (COB)	LT162
Screen Size (inch)	135	135	162
Dimension (mm)	Wall Mounted :3015*1821*96 Pedestal Mounted :3015*2588*700		Wall Mounted :3615*2151*96 Pedestal Mounted :3615*2913*700
LED Type	SMD	COB	SMD
Resolution (pixel)	1920*1080		
Refresh Rate (Hz)	3840		
Frame Rate (Hz)	50/60		
Brightness (nits)	100-450	100-600 (Adjustable)	100-450
Brightness Uniformity	97%/±0.003		
Color Temperature (K)	2000-10000 (Adjustable)		
Viewing Angle (H/V)	160°/160°	170° / 170°	160°/160°
Voltage (V)	AC 100~240		
IP Rating	IP30		
Weight (Kg)	Wall Mounted :140/Pedestal Mounted :198	Wall Mounted :128/Pedestal Mounted : 186	Wall Mounted :190/Pedestal Mounted :248
Average Power Consumption (KW/pc)	0.76	0.53	0.83
Max Power Consumption (KW/pc)	2.28	1.55	2.49
System		Android (Standard) / Windows (Optional)	
I/O	Video	HDMI 2.0*2 (Input)/HDMI 2.0*1 (Output)	
	Audio	3.5mm Audio jack*1 (Output)/SPDIF*1	
	Data	RJ45*1/USB 3.0*1/USB2.0*1/USB 2.0*2 (Front)	
	Control	USB 2.0*1 (USB-B)/USB-C*1/SENSOR*1 (RJ11)	

*Above parameters are for reference only. For more details, please contact our sales team. All rights reserved.

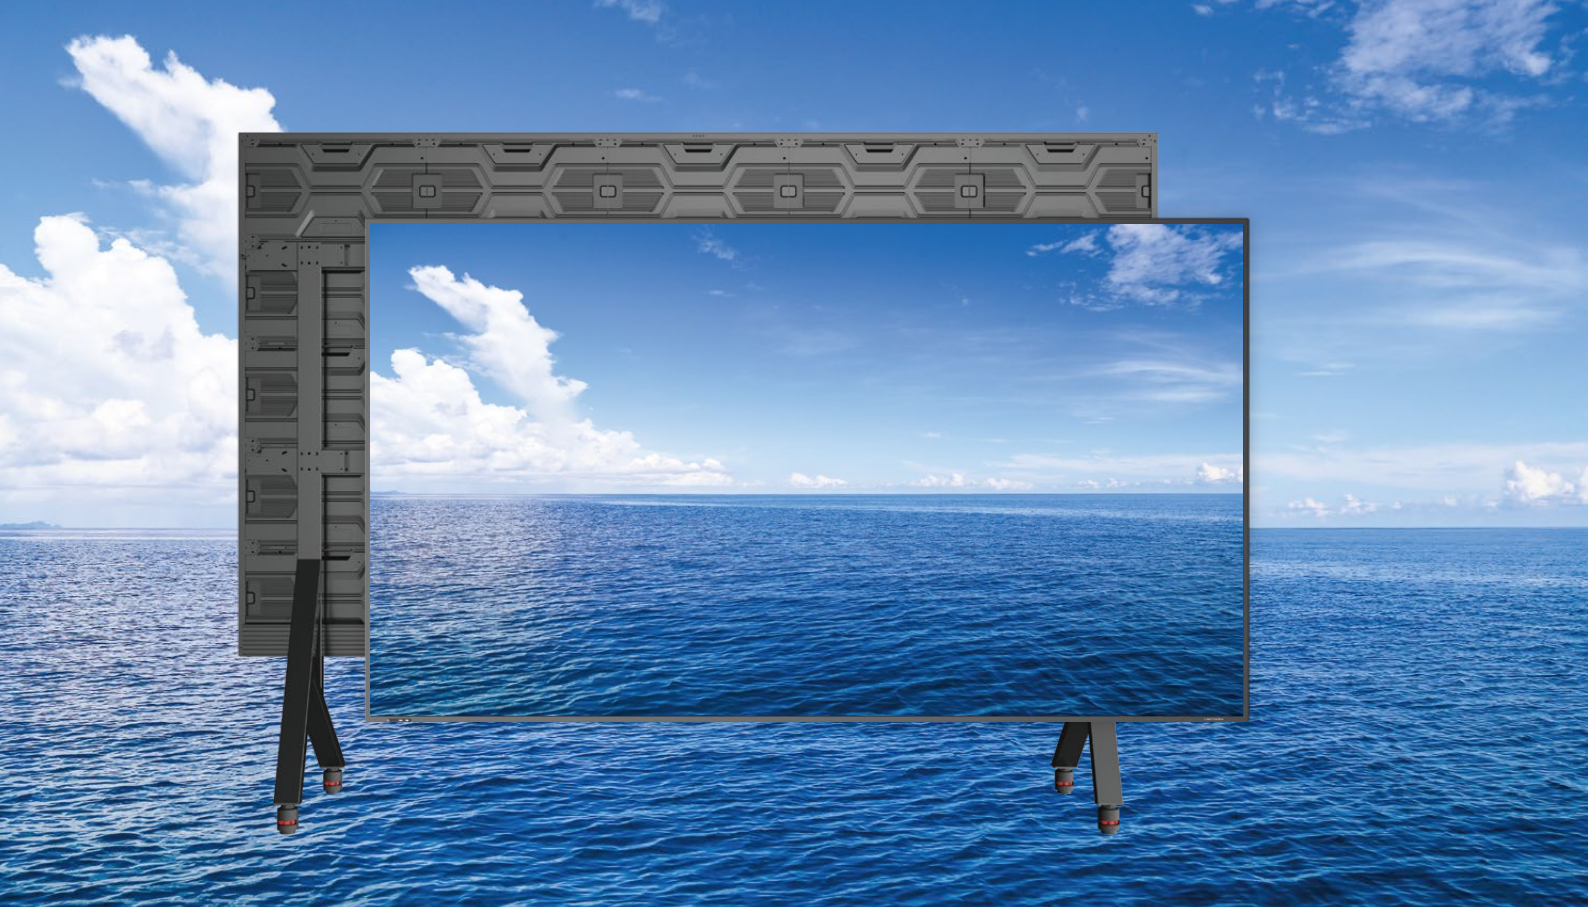

LT135 (Touchscreen)

METAGO

Smart Collaboration at Your Fingertips			
Model	LT135 (Touchscreen)		
Screen Size (inch)	135		
Dimension (mm)	Wall Mounted :3047*1735*86 Pedestal Mounted :3047*2238*750		
LED Type	COB		
Resolution (pixel)	1920*1080		
Refresh Rate (Hz)	3840		
Frame Rate (Hz)	50/60		
Brightness (nits)		100-600 (Adjustable)	
Brightness Uniformity	97%/±0.003		
Color Temperature (K)	2000-10000 (Adjustable)		
Viewing Angle (H/V)	170° / 170°		
Voltage (V)	AC 100~240		
IP Rating	IP30		
Weight (Kg)	Wall Mounted :180/Pedestal Mounted :220		
Average Power Consumption (KW/pc)	0.53		
Max Power Consumption (KW/pc)	1.6		
System		Android / Windows	
I/O	Video	HDMI 2.0*2 (Input)/HDMI 2.0*1 (Output)	
	Audio	3.5mm Audio jack*1 (Output)/SPDIF*1	
	Data	RJ45*1/USB 3.0*1/USB2.0*1/USB 2.0*2 (Front)	
	Control	USB 2.0*1 (USB-B)/USB-C*1/SENSOR*1 (RJ11)	

*Above parameters are for reference only. For more details, please contact our sales team. All rights reserved.

Cases



Meeting Room of Bohai Institute of Advanced Technology



Meeting Room of Integrated Command Center of Xiangcheng District, Suzhou City



Meeting Room of E-commerce Technology Center of ZHAOGANG NETCOM, Shanghai



Training Hall of Zhong'an Chuanggu Technology Park

Cases



Reception Hall of Shanghai ICC



Meeting Room of Hibiscus Petroleum, Malaysia



Showroom of Damei Real Estate, Shanghai



Studio of 7th CISM Military World Games