


Considerate Details, Reliable Designs

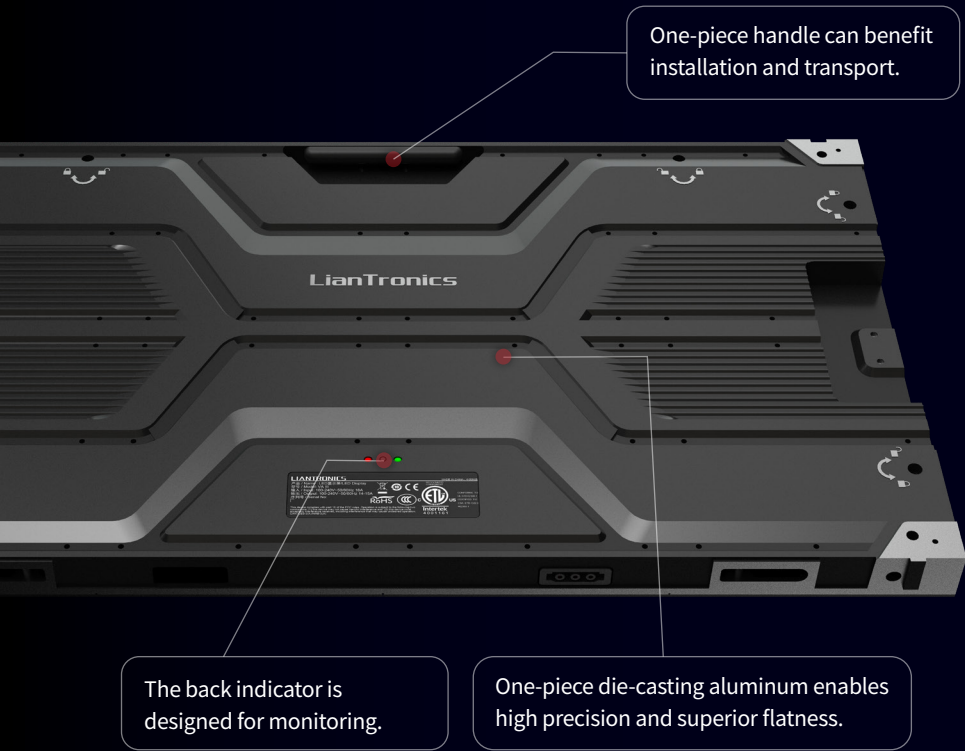

16:9 Golden Ratio, Gorgeous Display

16:9 golden ratio brilliantly matches mainstream HD/4K/8K videos while maintaining pixel-to-pixel broadcasting; The 27-inch single cabinet can directly replace LCD display with distortion-free images.

*Take FHD(1920x1080 resolution) splicing as an example



Specifications

Model	VAIII1.2	VAIII1.5	VAIII1.8
Pixel Pitch (mm)	1.2	1.5	1.8
Pixel Density (dot/m ²)	640000	409600	284444
LED Type	SMD	SMD	SMD
Module Size W×H (mm)	300*168.75		
Module Resolution W×H (pixel)	240*135	192*108	160*90
Panel Size W×H×D (mm)	600*337.5*33		
Panel Resolution W×H (pixel)	480*270	384*216	320*180
Panel Material	Die-casting Aluminum		
Weight (Kg/pc)	4.5		
Brightness (cd/m ²)	600		
Brightness Adjustment	Programmable/Automatic/Manual		
Viewing Angle (H/V)	160°/160°		
Frame Rate (Hz)	50/60		
Refresh Rate (Hz)	3840		
Contrast Ratio	8000:1		
Color Temperature (K)	2000~10000 (Adjustable)		
Voltage (V)	AC 100-240		
Maximum Power Consumption (W/m ²)	450	420	420
Average Power Consumption (W/m ²)	112	105	105
Serviceability	Front		
IP Rating	Front IP30/Rear IP60		
LED Lifetime (Hours)	100000		

*Above parameters are for reference only. For more details, please contact our sales team. All rights reserved to LianTronics.

16/F, Block B4, Building 9, Zone 2, Shenzhen Bay Science and Technology Ecological Park, Nanshan District, Shenzhen, China

service@liantronics.com

www.liantronics.com




Web



Facebook

5G VAIII Series

5G High-End Fine-Pitch LED Display

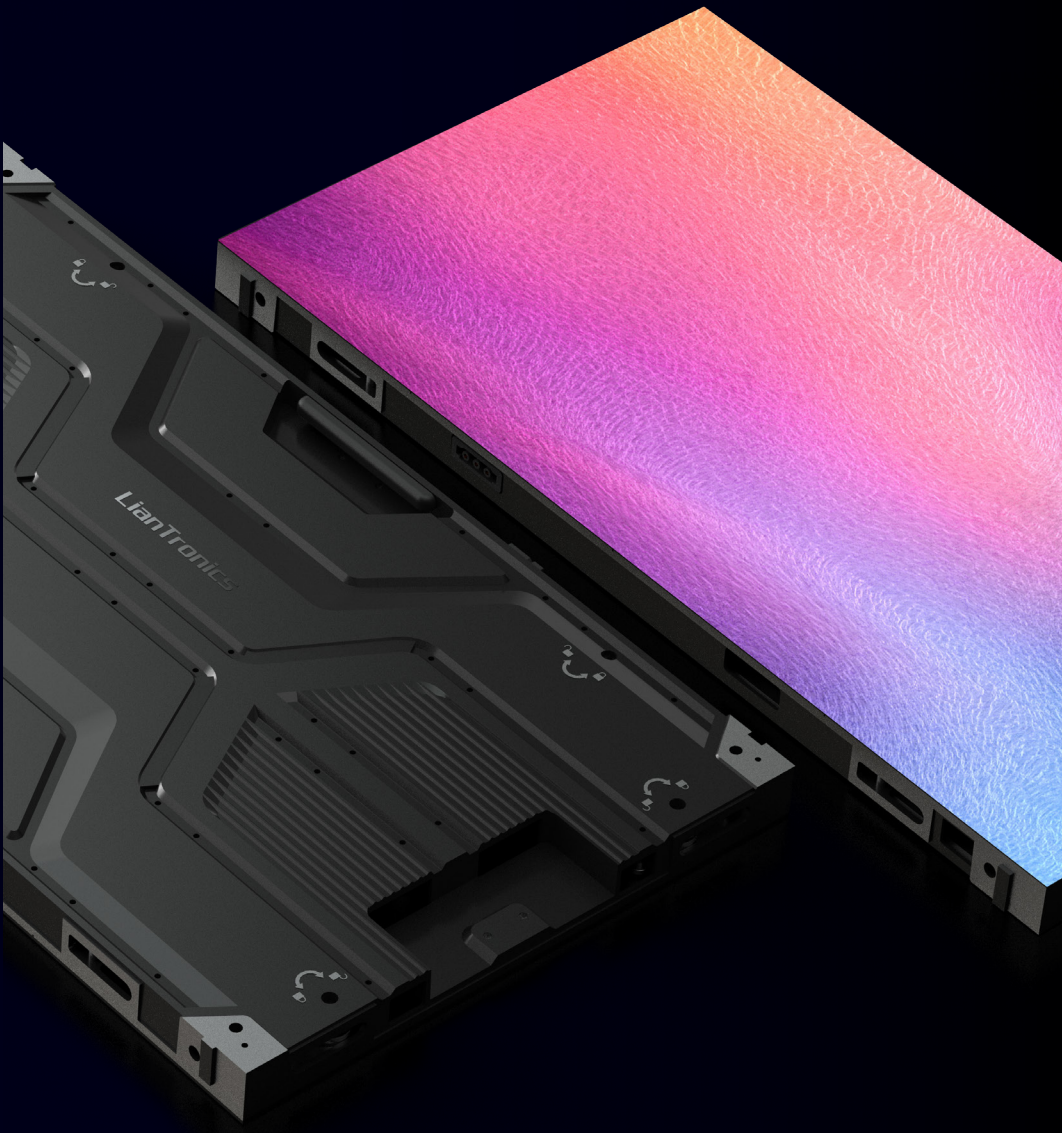

Extreme-Thin & Light



5G Transmission



Quadruple Backup



Fast Interlock




Flexible Splicing



Considerate Details

Fast & Easy Installation & Maintenance

Fast interlock enables 1-second quick installation including wall-mounting, hanging, and stacking. Full front maintenance saves space & time.

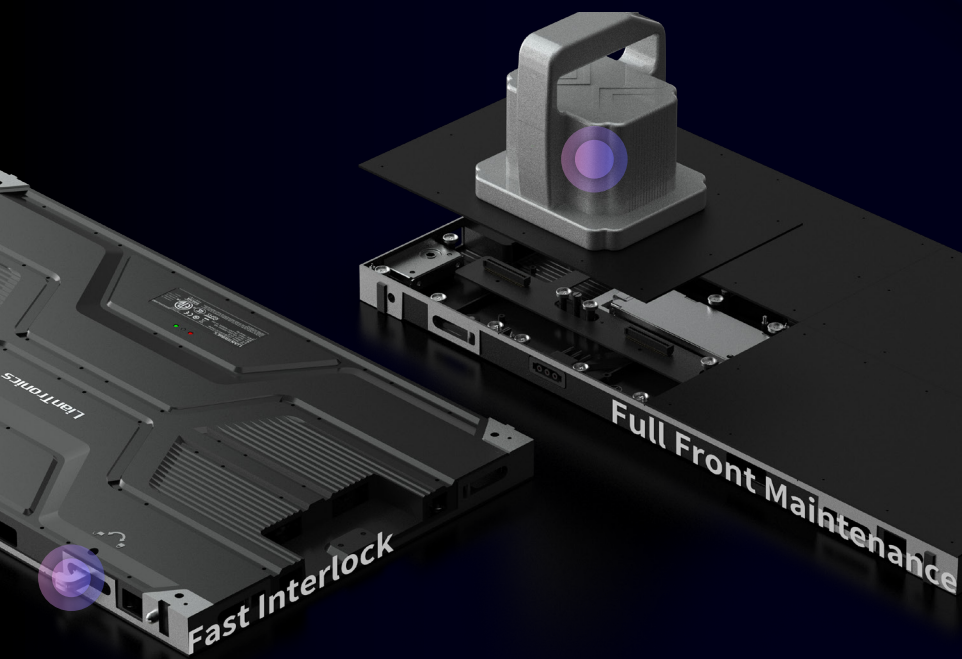




5G Transmission, Easier & More Stable

5G transmission enables 5G+8K display to enhance system efficiency, and meanwhile lower down the wiring difficulty by reducing the number of cables and devices to improve display stability.



Flexible Splicing with High Flatness

VVIII Series enables horizontal half-cabinet cutting, 45° bevel for seamless L-shaped splicing & curved splicing flexibly. Unique 6-Dimensional Minitrim Technology guarantees high flatness to achieve superior display.

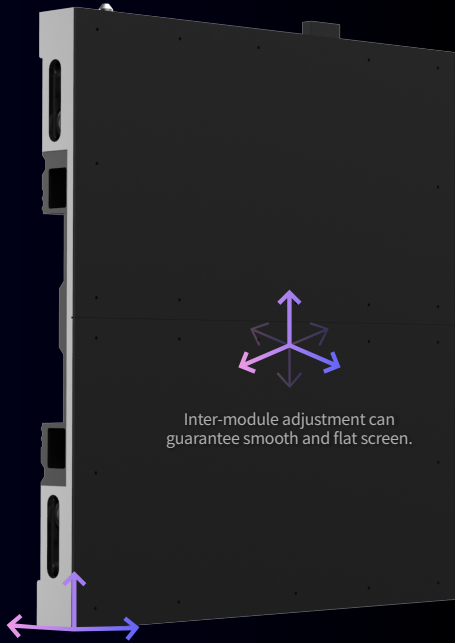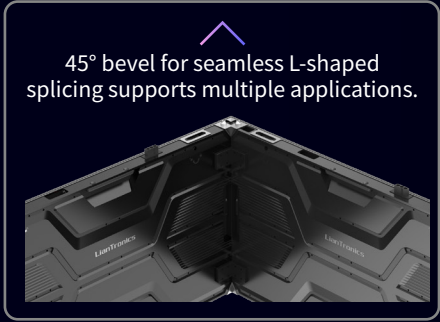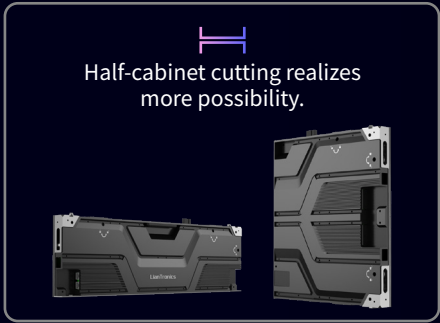


Stacking




Wall Mounting



French Cleat

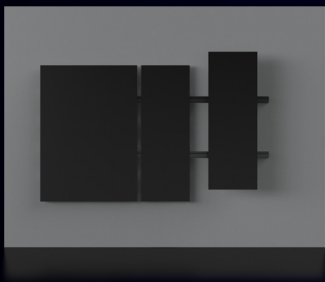


Hanging

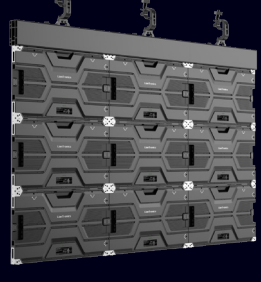

Light & Slim Ever

33mm-extreme-thin cabinet with 4.5kg/pc lightweight only greatly saves steel structure, transport expenses, and installation costs.

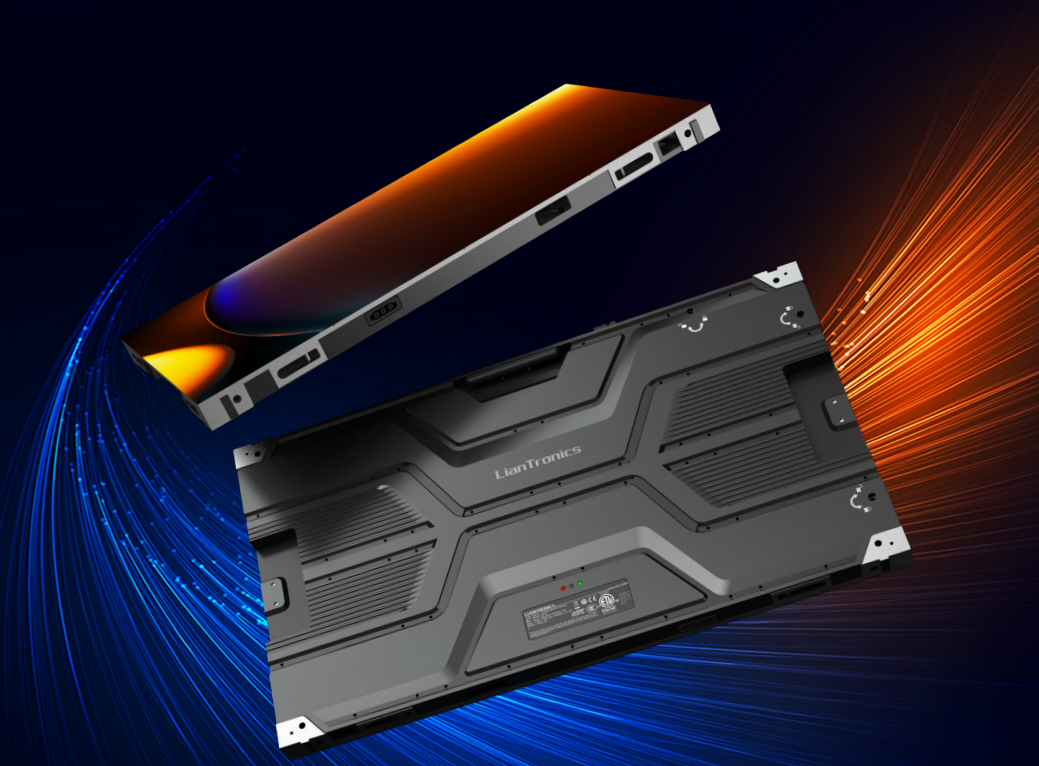

Quadruple Backup, Never Blackout

VVIII Series allows multiple backup including power, receiving cards, power connectors, & signal connectors. The quadruple backup ensures never a blackout in the normal case.

