

BIM Plus-T/TX

Indoor Commercial Dual-side Display



Twin Display



Unique Panel Design



Excellent Dissipation



Versatile Sizes



Flexible Maintenance



Wireless Connection



◆ Dual Sides, Twin Impact



- Switch between single-side(BIM Plus-T) and dual-side(BIM Plus-TX) mode for various applications
- Dual-side mode(BIM Plus-TX) supports different pixel pitch, brightness levels and independent content on each side




◆ Versatile Sizes Meet Different Needs

Three different panel sizes (500*1000/750*250/500*250mm) enable flexible and seamless splicing



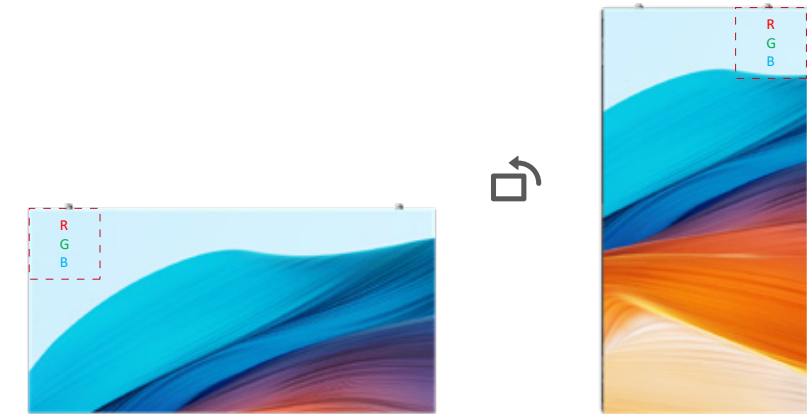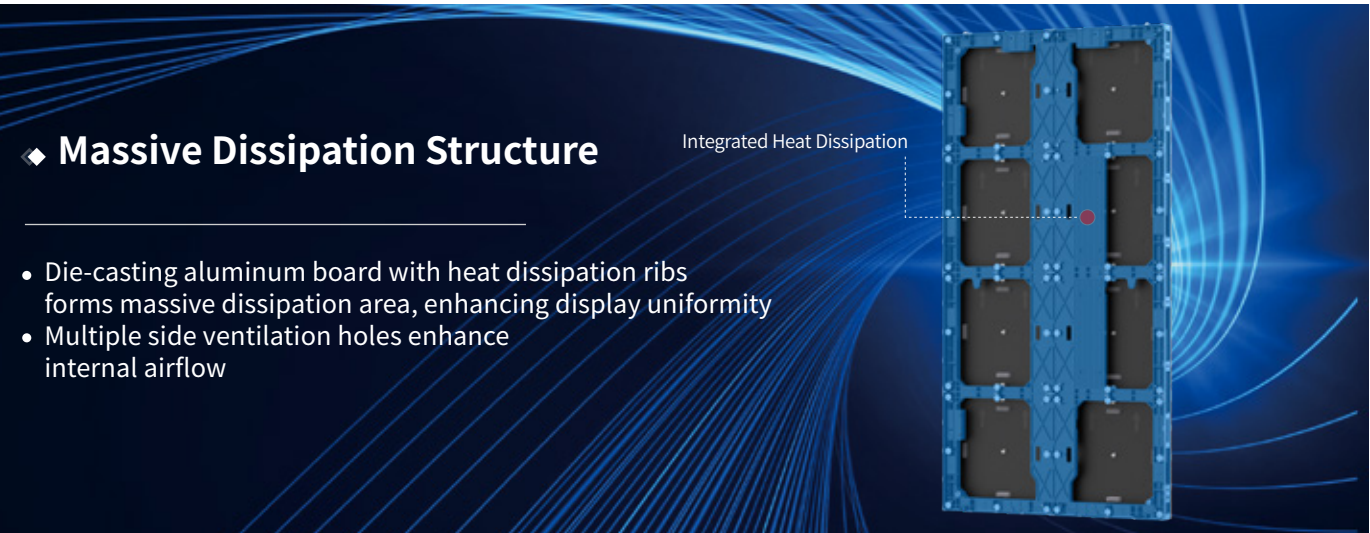

For single-side mode, module, receiving card, power supply, and hub board support rear maintenance

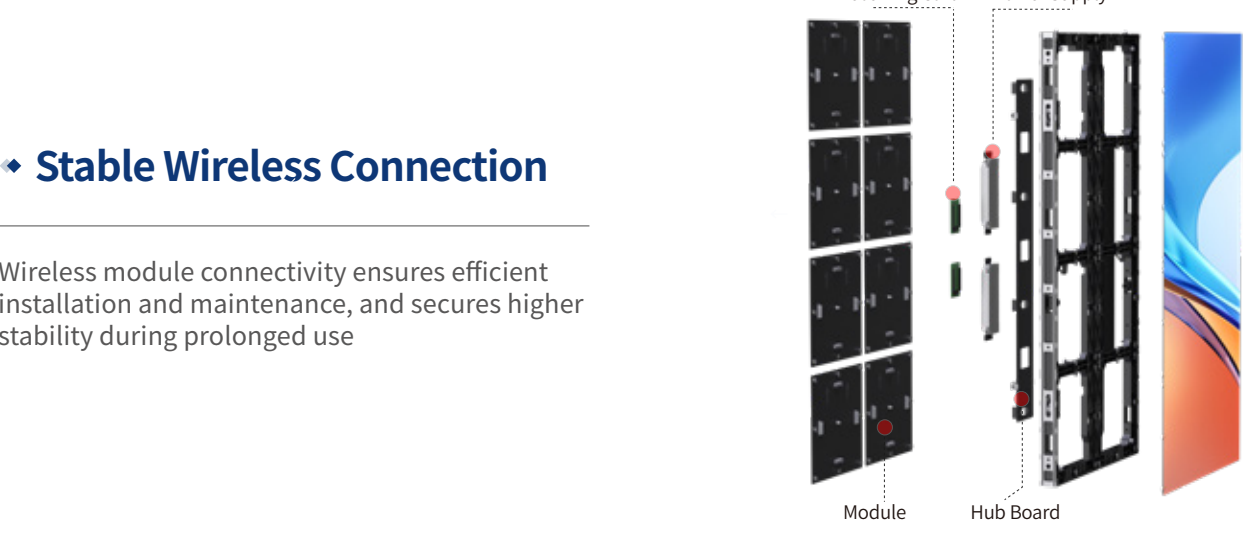

Display Mode	Single side				Double side			
Model	BIM Plus-T1.9		BIM Plus-T2.6		BIM Plus-TX1.9		BIM Plus-TX2.6	
Pixel Pitch (mm)	1.9		2.6		1.9		2.6	
Pixel Density (pixels/m²)	262144		147456		262144		147456	
LED Type	SMD				SMD			
Module Size W*H (mm)	250*250				250*250			
Panel Size (mm)	500*1000*43/750*250*43/500*250*43				500*1000*45/750*250*45/500*250*45			
Module Resolution W*H (pixel)	128*128		96*96		128*128		96*96	
Panel Material	Die-casting Aluminum				Die-casting Aluminum			
Weight (Kg/pc)	10.5 / 5 / 3.5				12.5 / 6 / 4			
Voltage (V)	AC 110~240				AC 110~240			
Brightness (nits)	800	3500	900	3500	800	3500	900	3500
Viewing Angle (H/V)	160°/160°				160°/160°			
Gray Scale (bit)	14~16				14~16			
Refresh Rate (Hz)	3840				3840			
Contrast Ratio	8000:1	5000:1	8000:1	5000:1	8000:1	5000:1	8000:1	5000:1
Color Temperature (K)	2000~10000 (Adjustable)				2000~10000 (Adjustable)			
Maximum Power Consumption (W/m²)	460				460*2 panel			
Average Power Consumption (W/m²)	115				115*2 panel			
Serviceability	Rear				Front			
IP Rating	IP30				IP30			
LED Lifespan (Hours)	100000				100000			
Certifications	CB, EMC, LVD, RoHS, ETL, PSE, FCC, CCC, Tensile Test Report							

*Above parameters are for reference only. For more details, please contact our sales team. All rights reserved.